

# FX100 Audio Analyzer

## Technical Specifications

| Analog Generator  |   |
|---|---|
| <b>Number of channels</b>   | 2 or 4 (optional); channel independent signal level, frequency control  |
| <b>Connectors</b><br>Types<br>Configurations  | XLR   BNC   Binding post (ground)<br>Balanced   unbalanced   unbalanced grounded   common signal test   |
| <b>Test signals</b>   | Sinusoidal<br>StepSweep (2 to 500 points; frequency   level   time sweep)<br>GlideSweep (0.1 s to 40 s)<br>White noise (cf = 3.646), Pink noise (cf = 3.846)<br>IMD (acc. IEC60268/3)   |
| <b>Level</b><br>Range<br>Balanced<br>Unbalanced<br>Accuracy <sup>1)</sup><br>Balanced, unbalanced GND, CMST<br>Unbalanced (if grounded externally)<br>Flatness<br>10 Hz to 20 kHz<br>10 Hz to 80 kHz<br>Setting resolution<br>-40 dBV to +24.9 dBV<br>< -40 dBV | -100 dBV to +21.9 dBV (10 $\mu$ V to 12.45 V) for 600 $\Omega$ load @ 24 dBu<br>-100 dBV to +15.9 dBV (10 $\mu$ V to 6.22 V)<br>< $\pm 0.04$ dB @ 1 kHz, output load > 2 k $\Omega$<br>< +0.02 / -0.06 dB @ 1 kHz, output load > 2 k $\Omega$<br>$\pm 0.01$ dB @ (-80 dBV to +21.9 dBV)<br>$\pm 0.08$ dB @ (-80 dBV to +21.9 dBV)<br>$\pm 0.01$ dB<br>$\pm 0.05$ dB |
| <b>Frequency</b><br>Range<br>Resolution<br>Accuracy <sup>2)</sup>   | 5 Hz to 80 kHz<br>< 2 ppm<br>$\pm 25$ ppm (standard version)   $\pm 2.5$ ppm (with AES option installed)  |
| <b>Residual THD+N</b> <sup>1)</sup><br>1 kHz, 0 dBV<br>Fundamental 20 Hz to 20 kHz<br>Fundamental 10 Hz to 80 kHz   | $\leq -104$ dB typical<br>$\leq (-101$ dB + 0.8 $\mu$ V) @ 22 kHz BW <sup>3)</sup><br>$\leq (-92$ dB + 1.6 $\mu$ V) @ 80 kHz BW <sup>3)</sup>   |
| <b>IMD MOD</b><br>Low frequency tone range $f_1$<br>High frequency tone range $f_2$<br>Amplitude ratio<br>Residual IMD MOD d2+d3<br>1:1 amplitude ratio<br>4:1 amplitude ratio<br>10:1 amplitude ratio  | 60 Hz to 1 kHz<br>2 kHz to 20 kHz, $f_2 \geq 6.1 * f_1$<br>1:1, 4:1 and 10:1<br>typ. -101 dB @ 0 dBV, $f_1 = 60$ Hz, $f_2 = 20$ kHz, amplitude ratio 1:1<br>$\leq -95$ dB <sup>3),4)</sup> @ output level > -20 dBV<br>$\leq -90$ dB <sup>3),4)</sup> @ output level > -20 dBV<br>$\leq -85$ dB <sup>3),4)</sup> @ output level > -20 dBV                           |
| <b>IMD DFD</b><br>Mean frequency range $f_m$<br>Difference frequency range $f_d$<br>Residual IMD DFD d2+d3  | 2.5 kHz to 20 kHz<br>80 Hz to 2 kHz<br>typ. -108 dB @ 0 dBV, $f_m = 80$ Hz, $f_d = 20$ kHz<br>$\leq -100$ dB <sup>3),4)</sup> @ output level > -20 dBV  |
| <b>IMD DIM</b><br>Square frequency<br>Sine frequency<br>Amplitude ratio<br>Residual IMD DIM   | 3.15 kHz (DIM 30 or DIM 100)<br>15 kHz<br>4:1, square to sine peak-peak<br>typ. -103 dB @ 0 dBV<br>$\leq -95$ dB <sup>3),4)</sup> @ output level > -20 dBV  |

<sup>1)</sup> For loads < 2 k $\Omega$ , the FX100 generator inward resistance (approx. 1.8  $\Omega$ ) degrades the output level accuracy.

<sup>2)</sup> Temperature range +20 to +45  $^{\circ}$ C;  $\pm 1$  ppm ageing p.a.

<sup>3)</sup> System specification includes contribution from both generator and analyzer; generator only and analyzer only contributions are typically less.

<sup>4)</sup> Applies for all FX100 units with serial number  $\geq 11221$ ; for instruments with a lower serial number, +5 dB have to be added.



|  |  |
|--|--|
| <b>Measurement functions</b>               | <p>Frequency [Hz ; ppmr]<br/> Level [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> Selective level [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> Input level [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> THD+N [% ; dB ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> THD [% ; dB ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> Harmonic distortion k2 to k35 [% ; dB ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> IMD (acc. IEC60268/3) [% ; dB]<br/> FFT [V ; dBV ; dBu ; dB SPL ; dBPa ; dBr ; W]<br/> Gain [% ; dB]<br/> Inter-channel phase [Deg ; Rad]<br/> XTalk [% ; dB]<br/> Signal latency [s]<br/> PureSound™ steepness [Pa/s ; V/s] (optional)<br/> DCV differential [V]<br/> DCV common high (XLR pin 2-1); low (XLR pin 3-1) [V]<br/> DCR [Ω]<br/> Impedance [Ω] (requires SIP, SIL or SIH option)</p> |
| <b>Sweep modes</b>                         | <p>StepSweep: Frequency ; Amplitude ; Time ; Table sweep<br/> GlideSweep: Frequency sweep</p>  |
| <b>Level measurement</b>                   | <p>Range &lt; 1 μV to 200 Vp<br/> Resolution ±0.01 dB<br/> Accuracy ±0.04 dB @ 1 kHz<br/> Flatness (AC coupling OFF) <sup>8)</sup><br/> 20 Hz to 20 kHz <sup>9)</sup> ±0.015 dB<br/> 10 Hz to 80 kHz <sup>9)</sup> ±0.1 dB<br/> Generator + analyzer 20 Hz to 20 kHz ±0.025 dB<br/> Generator + analyzer 10 Hz to 80 kHz ±0.2 dB<br/> Additional tolerance with AC coupling ON<br/> -0.01 dB @ 20 Hz typical ; -0.065 dB @ 10 Hz ; -0.3 dB @ 5 Hz<br/> Residual noise<br/> A-weighted ≤ 1.2 μV (-118.4 dBV)<br/> 20 kHz BW ≤ 1.6 μV (-116.0 dBV)<br/> 80 kHz BW ≤ 3 μV (-110.5 dBV) ; 2.5 μV (-112 dBV) typical</p>  |
| <b>Frequency measurement</b>               | <p>Range 5 Hz to 80 kHz<br/> Resolution &lt; 0.1 ppm<br/> Accuracy<br/> 5 Hz to 10 Hz ≤ ±25 ppm (standard) ; ±2.5 ppm (with AES board) absolute + measurement error ±50 ppm<br/> 10 Hz to 80 kHz ≤ ±25 ppm (standard) ; ±2.5 ppm (with AES board) absolute + measurement error ±1 ppm</p>  |
| <b>THD ; THD+N ; harmonics measurement</b> | <p>Range 0 % to 100 %<br/> Accuracy ≤ ±0.5 dB (10 Hz to 80 kHz)<br/> THD fundamental measurement range<br/> Source internal generator 5 Hz to 80 kHz<br/> Source external generator 10 Hz to 80 kHz<br/> Minimum input level for fundamental frequency detection ≤ 0.1 mV<br/> Analyzer residual THD / harmonics (22 kHz BW)<br/> Fundamental 0 dBV @ 1 kHz ≤ -107 dB typical<br/> Fundamental 20 Hz to 20 kHz <sup>10)</sup> ≤ (-104 dB + 0.5 μV)<br/> Generator + analyzer residual THD+N <sup>11)</sup> ≤ (-104 dB + 1.7 μV) @ 1 kHz, 0 dBV, 22 kHz BW typical<br/> Fundamental 20 Hz to 20 kHz ≤ (-101 dB + 1.7 μV) @ 22 kHz BW<br/> Fundamental 10 Hz to 80 kHz ≤ (-92 dB + 3.4 μV) @ 80 kHz BW<br/> Fundamental 5 Hz to 10 Hz ≤ (-90 dB + 3.4 μV) @ 80 kHz BW (source internal generator)</p>                |
| <b>IMD MOD</b>                             | <p>Low frequency acceptance range <math>f_1</math> 60 Hz to 1 kHz<br/> High frequency acceptance range <math>f_2</math> 2 kHz to 20 kHz, <math>f_2 \geq 6.1 * f_1</math><br/> MOD component analysis d2, d3, d2+d3, or d2 ... d5<br/> Residual IMD MOD d2+d3 typ. -101 dB @ 0 dBV, <math>f_1 = 60</math> Hz, <math>f_2 = 20</math> kHz, amplitude ratio 1:1<br/> 1:1 amplitude ratio ≤ -95 dB <sup>3), 4)</sup> @ output level &gt; -20 dBV<br/> 4:1 amplitude ratio ≤ -90 dB <sup>3), 4)</sup> @ output level &gt; -20 dBV<br/> 10:1 amplitude ratio ≤ -85 dB <sup>3), 4)</sup> @ output level &gt; -20 dBV</p>   |

<sup>8)</sup> Specified for Meter and StepSweep. For GlideSweep, the length must be ≥ 0.2 s and ±0.01 dB ripple has to be added.

<sup>9)</sup> Specified by design and characterization; not production tested.

|   |  |
|---|--|
| <b>IMD DFD</b><br>Mean frequency acceptance range $f_m$<br>Difference frequency acceptance range $f_d$<br>DFD component analysis<br>Residual IMD DFD d2+d3  | 2.5 kHz to 20 kHz<br>80 Hz to 2 kHz<br>d2, d3, d2+d3, or d2 ... d5<br>typ. -108 dB @ 0 dBV, $f_m = 80$ Hz, $f_d = 20$ kHz<br>$\leq -100$ dB <sup>3), 4)</sup> @ output level > -20 dBV   |
| <b>IMD DIM</b><br>Square frequency<br>Sine frequency<br>DIM component analysis<br>Residual IMD DIM  | 3.15 kHz (DIM 30 or DIM 100)<br>15 kHz<br>u1 ... u9 or u4+u5<br>typ. -103 dB @ 0 dBV<br>$\leq -95$ dB <sup>3), 4)</sup> @ output level > -20 dBV   |
| <b>Interchannel phase measurement</b><br>Range<br>Accuracy <sup>12)</sup><br>10 Hz to 20 kHz<br>20 kHz to 80 kHz  | -180° to 180°<br><br>$\leq \pm 1^\circ$<br>$\leq \pm 3^\circ$  |
| <b>XTalk measurement</b><br>Frequency range<br>Residual XTalk <sup>13)</sup><br>10 Hz to 20 kHz<br>20 kHz to 80 kHz   | 10 Hz to 80 kHz<br><br>< (-125 dB + 1 $\mu$ V)<br>< (-105 dB + 1 $\mu$ V)  |
| <b>Signal latency measurement</b><br>Range<br>GlideSweep sync source internal<br>GlideSweep sync source external<br>Residual signal latency<br>Resolution<br>Accuracy <sup>14)</sup><br>DUT bandwidth $\geq 100$ Hz to 20 kHz<br>DUT bandwidth $\geq 100$ Hz to 15 kHz<br>DUT bandwidth $\geq 300$ Hz to 8 kHz<br>DUT bandwidth $\geq 300$ Hz to 3.4 kHz<br>Speaker measurements <sup>15)</sup><br>Max. allowed interchannel latency difference | 0 s to 95 ms<br>0 s to 19 s<br>$\leq 0.05$ ms<br>0.005 ms<br><br>$\leq 0.05$ ms<br>$\leq 0.1$ ms<br>$\leq 0.2$ ms<br>$\leq 0.5$ ms<br>$\leq 0.1$ ms<br>$\leq 40$ ms  |
| <b>Filters</b><br>LowPass (real time; only one filter can be active at a time)<br><br>HighPass (real time; only one filter can be active at a time)<br><br>Weighting (real time; only one filter can be active at a time)   | 3.4 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 3.484 kHz, stopband attenuation > 97 dB @ 4.08 kHz)<br>8 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 8.196 kHz, stopband attenuation > 97 dB @ 9.6 kHz)<br>15 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 15.364 kHz, stopband attenuation > 99 dB @ 18 kHz)<br>20 kHz Brickwall, compliant to AES17 (10 Hz to 20 kHz passband ripple $\pm 0.1$ dB, stopband attenuation > 60 dB @ 24 kHz)<br>22.4 kHz, 4-pole, compliant to DIN45405<br>40 kHz, 12 <sup>th</sup> order (passband ripple $\pm 0.01$ dB, -3 dB point 40.86 kHz, stopband attenuation > 100 dB @ 48 kHz)<br><br>10 Hz, 3 <sup>rd</sup> order Butterworth (-3 dB point 10 Hz, stopband attenuation > 60 dB @ 1 Hz)<br>22.4 Hz, 4 <sup>th</sup> order, compliant to DIN 45405<br>100 Hz, 4 <sup>th</sup> order Butterworth (-3 dB point 100 Hz, stopband attenuation > 80 dB @ 10 Hz)<br>300 Hz, 4 <sup>th</sup> order Butterworth (-3 dB point 300 Hz, stopband attenuation > 90 dB @ 20 Hz)<br>400 Hz, 4 <sup>th</sup> order Butterworth (-3 dB point 400 Hz, stopband attenuation > 100 dB @ 20 Hz)<br><br>A-weighting, compliant to IEC 179 ; ANSI S1.4 ; IEC 61672-1<br>C-message weighting, compliant to ANSI/IEEE 743-1995 ; BSTM 41004 |
| <b>Input coupling</b>   | DC ; AC (-3 dB point < 3 Hz)   |
| <b>FFT</b><br>Analysis<br>Transform length<br>Sampling rate<br>Windows<br>Averaging (only in frequency domain)<br>Waveform display modes  | Fully channel-independent and independent of other simultaneous measurements<br>512 ; 1024 ; 2048 ; ... 1048576 ; 2097152 samples<br>192 kHz<br>4-term Blackman-Harris ; Hann (Hanning) ; none<br>Exponential ; arithmetical<br>Frequency domain ; time domain   |

<sup>10)</sup> Input level has to be  $\leq 19.5$  dBV

<sup>11)</sup> System specification includes contribution from both generator and analyzer; generator only and analyzer only contributions are typically less.

<sup>12)</sup> Both analyzer inputs must have the same coupling (AC ; DC), and the automatic input range is switched OFF.

<sup>13)</sup> System specification includes contribution from both generator and analyzer; one generator channel muted.

<sup>14)</sup> Accuracy can degrade due to impulse response band limitation; Brickwall filter assumed for the specified accuracy; listed cutoff frequency @ -3 dB point

<sup>15)</sup> With sample rate adjustment turned OFF

|   |   |
|---|---|
| <b>DCV measurement</b><br>Differential (XLR pin 2-3)<br>Input range setting<br>Accuracy<br>Common (XLR pin 2-1/3-1)<br>Range<br>Accuracy  | 460 mV to 200 V<br>$\leq \pm 0.6\%$ of input range setting<br>200 V (fixed)<br>$\leq \pm 50$ mV   |
| <b>DCR measurement</b><br>Range<br>Accuracy<br>4 $\Omega$ to 30 $\Omega$<br>30 $\Omega$ to 100 k $\Omega$   | 4 $\Omega$ to 5 k $\Omega$ ; 5 k $\Omega$ to 100 k $\Omega$ (manual Bias selection)<br>$< 4\%$<br>$< 0.8\%$   |
| <b>Interfaces</b>   |   |
| <b>Communication</b><br>USB host<br>USB device<br>LAN   | 2*USB mass-storage device (rear and front), A-plug, protocol version 2.0<br>Remote control USB-TMC, B-plug, protocol version 2.0<br><i>(for future use)</i>   |
| <b>Monitor output</b><br>Connector<br>Signals<br>Maximum output power   | 6.3 mm (¼") Jack<br>after the input filter stage ; after the PureSound™ bandpass<br>65 mW @ 32 $\Omega$ , software-controlled volume -80 dB to +40 dB   |
| <b>Auxiliary I/O</b><br>Configuration<br>Output<br>$V_{OHmin}$ (@ $I_{OH} = +3$ mA)<br>$V_{OLmax}$ (@ $I_{OL} = -3$ mA)<br>Impedance<br>Input<br>Level range<br>$V_{IH}$<br>$V_{IL}$<br>Impedance<br>Min. input pulse width<br>Max. protection against external Voltage | 8 programmable general purpose digital inputs & outputs<br>3.3 V <sub>TTL</sub><br>2.4 V<br>0.4 V<br>50 $\Omega$ typical<br>5 V <sub>TTL</sub><br>max. -0.5 to +5.5 V<br>2.0 V<br>0.8 V<br>10 k $\Omega$<br>$\geq 200$ $\mu$ s<br>42.4 Vp (according to IEC61011) |
| <b>General data</b>   |   |
| <b>Power supply</b>   | 100 ; 120 ; 230 VAC<br>50 ; 60 Hz   |
| <b>Temperature range</b><br>Operating conditions<br>Storage   | +5° to +45°C (+41° to +113°F)<br>-20° to +80°C (-20° to +176°F)   |
| <b>Humidity</b>   | $\leq 90\%$ R.H. (non condensing)   |
| <b>Mechanical dimensions</b>  | width 215 mm (8.5" i.e. half-rack)<br>height 132 mm (5.25" i.e. 3 RU)<br>length 429 mm (16.9")  |
| <b>Weight</b> (2-channel base unit w/o options)   | 5.12 kg (11.3 lbs)  |

**FX-SIP Option**

|   |  |
|---|--|
| <b>Output</b><br>Bandwidth<br>Power (BW 22 kHz) <sup>16)</sup><br>Dual operation<br>Bridged operation   | 5 Hz to 80 kHz ( $\pm 0.1$ dB relative to 1 kHz without load)<br><br>2*10 W into 2 $\Omega$ / 4 $\Omega$ or 2*5 W into 8 $\Omega$ THD < -80 dB / 0.01%<br>1*30 W into 2 $\Omega$ / 4 $\Omega$ or 1*20 W into 8 $\Omega$ THD < -86 dB / 0.005%  |
| <b>Amplifier gain</b>   | 0 dB   |
| <b>Output level</b><br>Overall Accuracy <sup>17)</sup><br>Added error due to amplifier inward resistance<br>Dual Mode (R <sub>i</sub> = 50 m $\Omega$ )<br>Bridge Mode (R <sub>i</sub> = 80 m $\Omega$ )<br>Flatness <sup>17)</sup><br>10 Hz to 20 kHz, load $\geq$ 2 $\Omega$<br>10 Hz to 80 kHz, load $\geq$ 8 $\Omega$<br>10 Hz to 80 kHz, load $\geq$ 2 $\Omega$  | $\pm 0.1$ dB (no load)<br>Loss = dB (R <sub>Load</sub> / (R <sub>Load</sub> + R <sub>i</sub> ))<br>+0 / -0.21 dB @ 2 $\Omega$ load   +0 / -0.11 dB @ 4 $\Omega$ load   +0 / -0.05 dB @ 8 $\Omega$ load<br>+0 / -0.34 dB @ 2 $\Omega$ load   +0 / -0.17 dB @ 4 $\Omega$ load   +0 / -0.09 dB @ 8 $\Omega$ load<br><br>$\pm 0.06$ dB<br>+0.1 / -0.2 dB<br>+0.1 / -0.4 dB   |
| <b>Inward resistance R<sub>i</sub></b><br>Dual mode (per channel)<br>Bridge mode  | $\leq$ 50 m $\Omega$ (20 m $\Omega$ typical)<br>$\leq$ 80 m $\Omega$ (40 m $\Omega$ typical)   |
| <b>Damping factor</b><br>Dual mode<br>Bridge mode   | > 80 @ 10 Hz to 10 kHz, load $\geq$ 4 $\Omega$<br>> 50 @ 10 Hz to 10 kHz, load $\geq$ 4 $\Omega$   |
| <b>THD</b> <sup>18)</sup><br>Dual mode (BW 22 kHz)<br>fundamental 1 kHz<br>fundamental 10 Hz to 20 kHz<br>Bridge mode (BW 22 kHz)<br>fundamental 1 kHz<br>fundamental 10 Hz to 20 kHz   | -101 dB typical (with 1 W @ 4 $\Omega$ )<br>$\leq$ -80 dB + 15 $\mu$ V (power 0 to 10 W, load 2 to 250 $\Omega$ )<br><br>-105 dB typical (with 5 W @ 4 $\Omega$ )<br>$\leq$ -86 dB + 15 $\mu$ V (power 0 to 30 W, load 2 to 250 $\Omega$ )   |
| <b>S/N ratio</b><br>A-weighted<br>BW 22.4 kHz<br>BW 80 kHz  | > 109 dB below rated power @ 4 / 8 $\Omega$<br>> 106 dB below rated power @ 4 / 8 $\Omega$<br>> 103 dB below rated power @ 4 / 8 $\Omega$  |
| <b>XTalk</b>  | < -60 dB, BW 10 Hz to 20 kHz   |
| <b>Slew rate</b>  | > 50 V/ $\mu$ s  |
| <b>Interchannel phase accuracy</b> <sup>12) 110)</sup>  | $\pm 1.3$ deg  |
| <b>Amplifier protection</b>   | Short circuit   overcurrent shutdown and automatic retry   thermal   |
| <b>Maximum output</b><br>Level<br>Dual mode<br>Bridge mode<br>Current   | 16.2 dBV<br>21.9 dBV<br>4.2 A (Bridge mode, 2 $\Omega$ load)   |
| <b>Impedance measurement</b> <sup>20)</sup><br>Nominal speaker impedance range<br>Measurement range<br>Nominal shunt resistance<br>Measurement accuracy <sup>20) 21)</sup><br>General accuracy<br>Meter, StepSweep 5 Hz to 1 kHz,<br>GlideSweep 20 Hz to 1 kHz<br>Meter, StepSweep 5 Hz to 10 kHz,<br>GlideSweep 20 Hz to 10 kHz<br>Bridge mode 4-wire (sense pins used)<br>Bridge mode 2-wire, Dual mode<br>Additional impedance measurement error with<br>GlideSweep < 20 Hz, 10 Hz to 10 kHz | 2 $\Omega$ to 250 $\Omega$<br>0 $\Omega$ to > 1 k $\Omega$<br>0.2 $\Omega$ / 0.1 % (in front of amplifier feedback $\Rightarrow$ no impact on FX-SIP output level)<br><br>$\pm 5$ % with Z = 2 $\Omega$ to 150 $\Omega$ <sup>22)</sup>   $\pm 7$ % with Z = 150 $\Omega$ to 250 $\Omega$ <sup>22)</sup><br>$\pm 10$ % with Z = 2 $\Omega$ to 150 $\Omega$ <sup>22)</sup>   $\pm 15$ % with Z = 150 $\Omega$ to 250 $\Omega$ <sup>22)</sup><br><br>$\pm 2$ % with Z = 2 $\Omega$ to 16 $\Omega$ <sup>22)</sup><br>$\pm 5$ % with Z = 2 $\Omega$ to 64 $\Omega$ <sup>22)</sup><br>+1 % |

<sup>16)</sup> Duty cycle (signal ON : OFF) must not exceed 1:2

<sup>17)</sup> Including FX100 generator output level tolerance

<sup>18)</sup> The generator Chn1 and Chn2 frequencies have to be the same

<sup>110)</sup> Tolerances contain all FX100 errors including generator output phase and analyzer input phase

<sup>20)</sup> Tolerances include all errors of FX100 generator output level, analyzer input level and FX-SIP shunt & inward resistance


<sup>21)</sup> Frequency range: Meter, StepSweep 5 Hz to 10 kHz | GlideSweep 20 Hz to 10 kHz

<sup>22)</sup> AC coupling OFF

|   |                  |
|---|------------------|
| <b>DCR measurement</b>                      |                  |
| Current source (DCR 250 Ω range)            | 24.925 mA / ±1 % |
| Range                                       |                  |
| Dual mode                                   | 0 Ω to 500 Ω     |
| Bridge mode                                 | 0 Ω to 1 k Ω     |
| Accuracy resistance DCR (auto range active) |                  |
| R = 2 Ω to 4 Ω                              | ±2.5 %           |
| R = 4 Ω to 250 Ω                            | ±1.2 %           |

### FX-SIL Option

|  |              |
|--|--------------|
| <b>Nominal shunt resistance</b>                | 1 Ω ±0.1 %   |
| <b>Recommended current range</b>               | 50 μA to 1 A |
| <b>Overcurrent detection</b>                   | 1.4 A ±10 %  |
| <b>Speaker power range</b>                     |              |
| Minimum power                                  | << 1 mW      |
| Maximum power @ 2 Ω                            | 2 W          |
| Maximum power @ 4 Ω                            | 4 W          |
| Maximum power @ 8 Ω                            | 8 W          |
| Maximum power @ 32 Ω                           | 32 W         |
| Maximum power @ 250 Ω                          | 32 W         |
| <b>Impedance measurement</b>                   |              |
| Nominal speaker impedance range                | 2 to 250 Ω   |
| Accuracy @ AC coupling OFF <sup>23), 24)</sup> |              |
| 5 Hz to 20 kHz                                 | ≤ ±1 %       |
| Accuracy @ AC coupling ON <sup>23), 24)</sup>  |              |
| 20 Hz to 20 kHz                                | ≤ ±1 %       |
| 10 Hz to 20 kHz                                | ≤ ±3 %       |
| 5 Hz to 20 kHz                                 | ≤ ±5 %       |
| <b>DCR measurement</b>                         |              |
| DC current source (DCR 250 Ω range)            | 5 mA ±1 %    |
| Range  | 2 to 250 Ω   |
| Accuracy                                       |              |
| R = 2 to 8 Ω                                   | ≤ ±2.5 %     |
| R = 8 to 250 Ω                                 | ≤ ±1 %       |

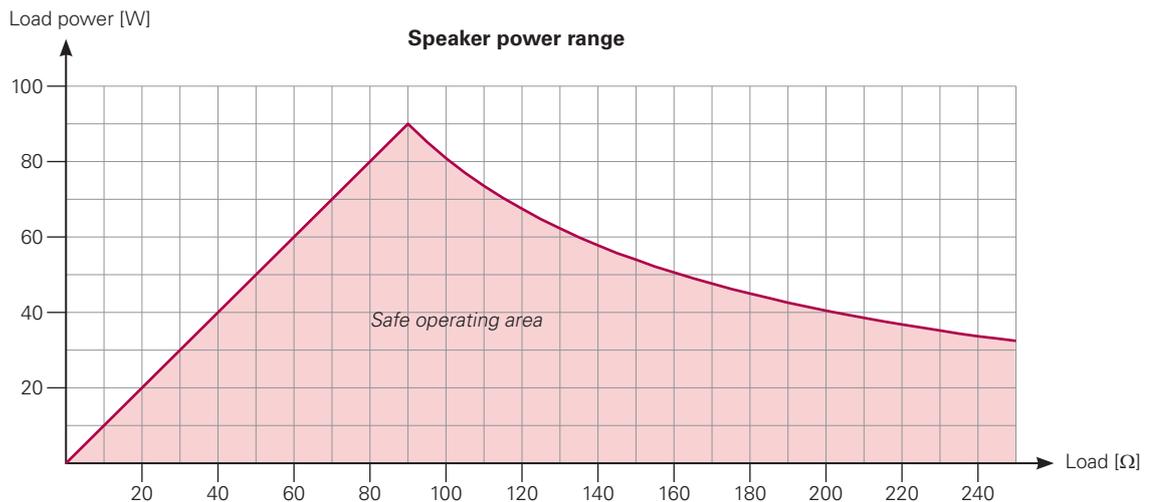


<sup>23)</sup> Cabling from amplifier to SIL, SIH in accordance to IEC 60268-12

<sup>24)</sup> Add 1% to tolerance if loudspeaker impedance is measured with 2 channels (i.e. reference @ amplifier terminal + shunt measurement)


**FX-SIH Option**

|  |  |
|--|--|
| <b>Nominal shunt resistance</b>  | 0.1 $\Omega$ $\pm$ 0.1 %   |
| <b>Recommended current range</b>   | 25 mA to 10 A  |
| <b>Overcurrent detection</b>   | 12 A $\pm$ 10 %  |
| <b>Speaker power range</b><br>Minimum power<br>Maximum power @ 2 $\Omega$<br>Maximum power @ 4 $\Omega$<br>Maximum power @ 8 $\Omega$<br>Maximum power @ 16 $\Omega$<br>Maximum power @ 32 $\Omega$  | < 1 W<br>200 W<br>400 W<br>800 W<br>1300 W<br>670 W  |
| <b>Impedance measurement</b><br>Nominal speaker impedance range<br>Accuracy @ AC coupling OFF <sup>23), 24)</sup><br>5 Hz to 20 kHz<br>Accuracy @ AC coupling ON <sup>23), 24)</sup><br>20 Hz to 20 kHz<br>10 Hz to 20 kHz<br>5 Hz to 20 kHz | 2 to 32 $\Omega$<br><br>$\leq \pm 1$ %<br><br>$\leq \pm 1$ %<br>$\leq \pm 3$ %<br>$\leq \pm 5$ % |
| <b>DCR measurement</b><br>DC current source (DCE 100 $\Omega$ range)<br>Range<br>Accuracy @ R = 2 to 100 $\Omega$  | 100 mA $\pm$ 1 %<br>2 $\Omega$ to 100 $\Omega$<br>$\leq \pm 2$ %                                 |

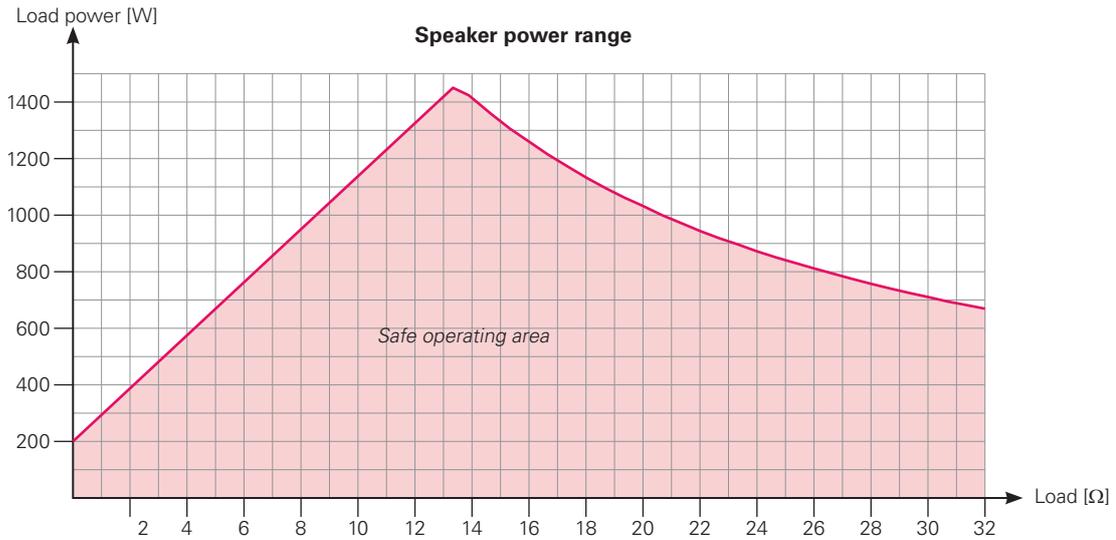

**FX-DF Option** <sup>25)</sup>

|  |  |
|--|--|
| <b>Operation range</b>   | D-class amplifier testing of up to 2 kW @ 8 Ω                        |
| <b>Maximum input voltage</b>   | ±200 Vp, 140 Vrms  |
| <b>Level measurement</b><br>Accuracy<br>Flatness 20 Hz to 20 kHz                                     | ±0.06 dB @ 1 kHz<br>±0.1 dB  |
| <b>High-frequency rejection</b>  | > 70 dB @ 300 kHz  |
| <b>Residual DFD acc. to IEC60268</b> <sup>26)</sup><br>Input Level ≤ 60 Vpp<br>Input Level ≤ 100 Vpp | < -100 dB<br>< -96 dB  |
| <b>Residual THD @ input level 60 Vpp</b><br>Typical<br>Maximum                                       | < -105 dB<br>< -100 dB @ fundamental input frequency 20 Hz to 10 kHz |
| <b>Residual crosstalk</b>  | < -100 dB  |
| <b>Residual noise</b> <sup>27)</sup>   | ≤ 10 μV (-100 dBV), BW 20 kHz  |

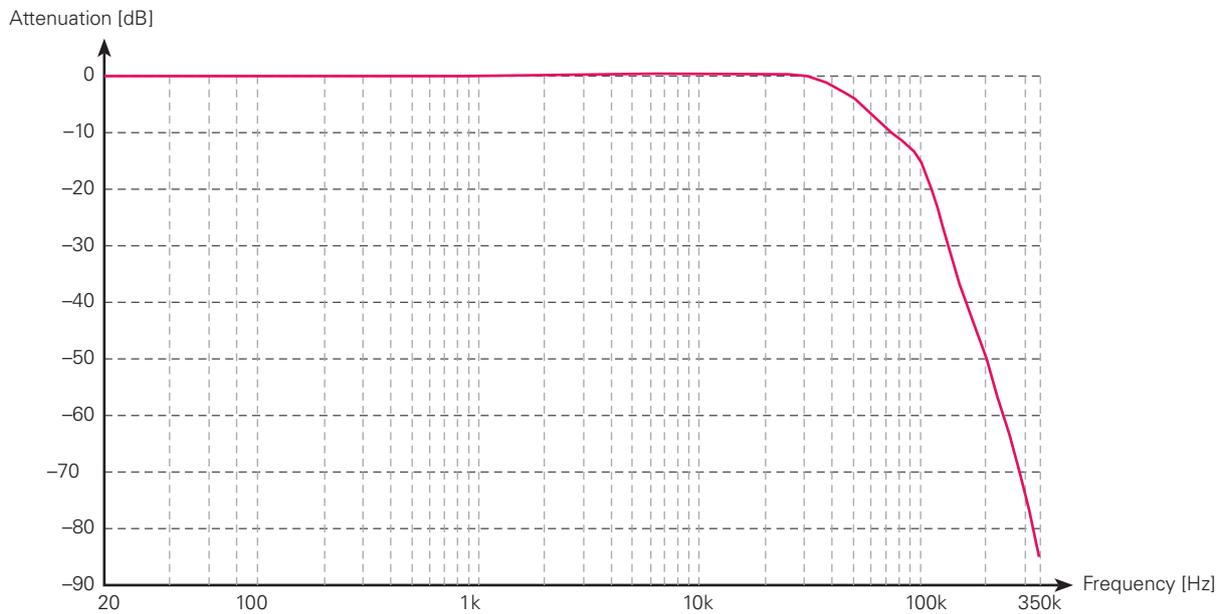

<sup>25)</sup> FX-DF specifications include FX100 Analyzer & Generator specifications whenever applicable

<sup>26)</sup> Test Frequencies 18 kHz + 20 kHz, DFD products 2<sup>nd</sup> order (@ 2 kHz) / 3<sup>rd</sup> order (@ 16 and 22 kHz)

<sup>27)</sup> FX-SIP power supply disconnected

**FX-AES Option**

| Digital Signal Generator                                  |   |
|---|---|
| <b>Interface</b>  |   |
| Balanced  |   |
| Format  | AES-EBU per AES3-2003   |
| Connector   | XLR   |
| Carrier amplitude   | 2.2 Vpp ±10 % into 110 Ω  |
| Output impedance  | 110 Ω   |
| Unbalanced  |   |
| Format  | S/PDIF-EIAJ per IEC60958-3 or AES3-id   |
| Connector   | BNC (S/PDIF with BNC to RCA adapter)  |
| Carrier amplitude   | 0.5 Vpp (S/PDIF)   1.0 Vpp (AES3-id) ±20 % into 75 Ω  |
| Output impedance  | 75 Ω  |
| Optical <sup>28)</sup>                                    | Toslink®, fs ≤ 192 kHz  |
| <b>Output sample rate</b>                                 |   |
| Source selection  | internal   digital input signal recovered   sync input  |
| Range   | 22 to 220 kHz   |
| Resolution  | ≤ ±0.0001 % (±1 ppm)  |
| Accuracy <sup>29)</sup>                                   | ≤ ±0.00025 % (±2.5 ppm) using internal reference  |
| <b>Audio data word length</b>                             | 16   18   20   24 bit (TPDF Dither added for < 24 bit)  |
| <b>Channel status bit setting</b>                         | Consumer format: channel independent selection, full implementation per IEC60958 (english language decoded)<br>Professional format: channel independant selection of bit #0 to #21, bit #32 to #39 per IEC 60958 (english language decoded) |
| <b>User bits</b>  | set to 0  |
| <b>Validity bit</b>                                       | channel independent toggling between Valid – Invalid  |
| <b>Signals</b>  | <i>same as analog output</i>  |
| <b>Level</b>  |   |
| Range   | -142 dBFS to 0 dBFS (0.0707 μFFS to 1 FFS, channel independent)   |
| Resolution  | ±0.001 dB   |
| Flatness  | ±0.006 dB   |
| Anti-Aliasing cut-off <sup>30)</sup>                      |   |
| -0.01 dB point  | 0.453 ±0.5 % * fs, typical 21.75 kHz with fs = 48 kHz   |
| -3 dB point   | 0.478 ±0.5 % * fs, typical 22.98 kHz with fs = 48 kHz   |
| Attenuation ≥ 120 dB                                      | 0.55 * fs, typical 26.2 kHz with fs = 48 kHz  |
| <b>Frequency range</b>                                    | 5 Hz to 80 kHz  |
| <b>Residual</b>   |   |
| Noise   | ≤ -128 dBFS (20 kHz BW)   |
| Jitter <sup>31)</sup>                                     | ≤ 2 ns peak (700 Hz to 100 kHz jitter BW)   |
| <b>Digital Signal Analyzer</b>                            |   |
| <b>Interface</b>  |   |
| Balanced  |   |
| Format  | AES-EBU per AES3-2003   |
| Connector   | XLR   |
| Unbalanced  |   |
| Format  | S/PDIF-EIAJ per IEC60958-3 or AES3-id, symmetrical input  |
| Connector   | BNC (S/PDIF with RCA to BNC adapter)  |
| Input impedance Bal/Unbal                                 | 110 Ω   75 Ω   Hi-Z (> 2k Ω)  |
| Carrier signal range                                      | 200 mVpp to 10 Vpp (covers AES3-2003   S/PDIF IEC 60958-3   AES3-id)  |
| Optical <sup>27)</sup>                                    | Toslink®, fs ≤ 192 kHz  |
| <b>AES recovered input carrier sample rate</b>            | 22 to 220 kHz   |
| <b>Measurement</b>  |   |
| Range   | 22 to 220 kHz   |
| Resolution  | ≤ ±0.00005 % (±0.5 ppm)   |
| Accuracy <sup>29)</sup>                                   | ≤ 0.00025 % (±2.5 ppm) internal reference accuracy ±0.00015 % (±1.5 ppm) frequency measurement accuracy   |
| <b>Detection range of standard sample rate</b>            | ±5000 ppm   |
| (32   44.1   48   64   88.1   96   128   176.4   192 kHz) |   |

<sup>28)</sup> Sampling rate fs ≤ 192 kHz for AES option installed after July 2014; otherwise fs ≤ 110 kHz

<sup>29)</sup> Specification valid for temperature range +20° to +45°C, excluding the aging (±1 ppm/year)

<sup>30)</sup> Specification valid for fs = 26 to 220 kHz

<sup>31)</sup> Specification valid for fs = 32 to 220 kHz, output source internal or SyncIn

|   |   |
|---|---|
| <b>Embedded data display</b>  | 24 bit activity indicators of each channel  |
| <b>Channel status bit indicators</b>  | Consumer format: channel independent selection, full implementation per IEC60958 (english language decoded)<br>Professional format: channel independant selection of bit #0 to #21, bit #32 to #39 per IEC 60958 (english language decoded)<br>Warning highlight mode if channel status differs from received data stream (e.g. audio word length, audio data mode, sample rate etc.) |
| <b>User bits</b>  | not displayed   |
| <b>Validity flag</b>  | displayed for each channel  |
| <b>Carrier condition indicator</b>  | parity   coding error   receiver synchronized   |
| <b>Level</b><br>Range<br>Resolution<br>Flatness<br>Anti-Aliasing cut-off <sup>27)</sup><br>-0.01 dB point<br>-3 dB point<br>Attenuation ≥ 120 dB              | -144 to 0 dBFS<br>±0.001 dB<br>±0.007 dB<br><br>0.453 ±0.5 % * fs, typical 21.75 kHz with fs = 48 kHz<br>0.478 ±0.5 % * fs, typical 22.98 kHz with fs = 48 kHz<br>0.55 * fs, typical 26.2 kHz with fs = 48 kHz  |
| <b>Frequency range</b><br>Meter, StepSweep<br>GlideSweep  | 5 Hz to 0.4986 * fs<br>5 Hz to 0.465 * fs   |
| <b>Residual noise</b>   | < -135 dBFS, BW 20 kHz  |
| <b>Measurements</b>   | same as in analog input mode, except of PureSound   DCV common   DCR Impedance  |
| <b>Sync Input Characteristics</b>   |   |
| <b>Interface</b><br>Format<br>Connector<br>Input impedance<br>Frequency range<br>Input amplifier range<br>Rise / fall time                                    | Squarewave or Video (PAL   NTSC)<br>BNC<br>75 Ω   Hi-Z (> 1 k Ω)<br>22 to 220 kHz, 15.625 kHz (PAL)   15.734 kHz (NTSC)<br>200 mVpp to 5 Vpp<br>< 500 ns  |
| <b>Sample rate measurement</b><br>Range<br>Resolution<br>Accuracy <sup>27)</sup>  | 22 to 220 kHz, 15.625 kHz (PAL)   15.734 kHz (NTSC)<br>≤ ±0000.5 % (±0.5 ppm)<br>≤ 0.00025 % (±2.5 ppm) internal reference accuracy ±0.00015 % (±1.5 ppm) frequency measurement accuracy  |
| <b>Detection range of standard sample rate</b><br>Video (15.625 kHz PAL   15.734 kHz NTSC)<br>Audio (32   44.1   48   64   88.1   96   128   176.4   192 kHz) | ±1500 ppm<br>±5000 ppm  |
| <b>Residual jitter<sup>29)</sup></b>  | ≤ 2 ns peak (700 Hz to 100 kHz jitter BW)   |
| <b>PLL loop filter</b>  | 5 kHz   |